

PLATFORM SCALES WITH PLASTIC HEAD



release date 14-09-2011



Platform scales series WPT are designed for direct trade, and they are utilized in applications requiring fast and precise determination of net mass.



Counting pieces



Checkweighing



Summing function

WPT series features an indicator series PUE C31 with backlit LCD display installed on:

- a pillar with possibility of adjusting the angle (WPT version);
- a cable (version WPT/K);
- attached to the platform (version WPT/R).

WPT scale is manufactured in mild steel, with stainless steel weighing platform.

WPT series can be powered either from mains or by batteries (6×AA).


Technical data:

	WPT 6 C1	WPT 15 C1	WPT 30 C1	WPT 30 C2	WPT 60 C2	WPT 150 C2	WPT 300 C2	WPT 150 C3	WPT 300 C3
	WPT 6 C1/K	WPT 15 C1/K	WPT 30 C1/K	WPT 30 C2/K	WPT 60 C2/K	WPT 150 C2/K	WPT 300 C2/K	WPT 150 C3/K	WPT 300 C3/K
	WPT 6 C1/R	WPT 15 C1/R	WPT 30 C1/R	WPT 30 C2/R	WPT 60 C2/R	WPT 150 C2/R	-	-	-
Max capacity	6 kg	15 kg	30 kg	30 kg	60 kg	150 kg	300 kg	150 kg	300 kg
Readability	2 g	5 g	10 g	10 g	20 g	50 g	100 g	50 g	100 g
Tare range	-6 kg	-15 kg	-30 kg	-30 kg	-60 kg	-150 kg	-300 kg	-150 kg	-300 kg
Pan size	290 × 350 mm			400 × 500 mm				500 × 700 mm	
Working temperature	-10° - +40 °C								
Output signal	RS 232								
IP rating	IP 43 indicator								
Power supply	230V AC, 50Hz / 11V AC and 6 × AA NiMH accumulator								
Operation time on batteries	~35 h								
Display	LCD (backlit)								
Net weight/Gross weight	6,5/7,8 kg			15,5/17,8 kg				20,5/26,8 kg	
Packaging dimensions	550×420×220 mm			720×580×220 mm				820×640×260 mm	

Technical data:


	WPT 3/6 C1	WPT 6/15 C1	WPT 15/30 C1	WPT 15/30 C2	WPT 30/60 C2	WPT 60/150 C2	WPT 150/300 C2
	WPT 3/6 C1/K	WPT 6/15 C1/K	WPT 15/30 C1/K	WPT 15/30 C2/K	WPT 30/60 C2/K	WPT 60/150 C2/K	WPT 150/300 C2/K
	WPT 3/6 C1/R	WPT 6/15 C1/R	WPT 15/30 C1/R	WPT 15/30 C2/R	WPT 30/60 C2/R	WPT 60/150 C2/R	-
Max capacity	3/6 kg	6/15 kg	15/30 kg	15/30 kg	30/60 kg	60/150 kg	60/150 kg
Readability	1/2 g	2/5 g	5/10 g	5/10 g	10/20 g	20/50 g	20/50 g
Tare range	-6 kg	-15 kg	-30 kg	-30 kg	-60 kg	-150 kg	-150 kg
Pan size	290 × 350 mm			400 × 500 mm			
Working temperature	-10° - +40 °C						
Output signal	RS 232						
IP rating	IP 43 indicator						
Power supply	230V AC, 50Hz / 11V AC and 6 × AA NiMH accumulator						
Operation time on batteries	~35 h						
Display	LCD (backlit)						
Net weight/Gross weight	6,5/7,8 kg			15,5/17,8 kg			
Packaging dimensions	550×420×220 mm			720×580×220 mm			

WPT C1

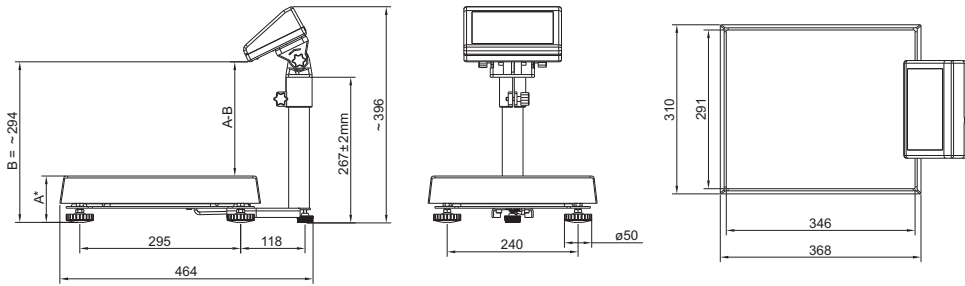


	A (±2mm)
WPT 6 C1	86
WPT 15 C1	86
WPT 30 C1	86
WPT 3/6 C1	86
WPT 6/15 C1	86
WPT 15/30 C1	104

WPT C1/R

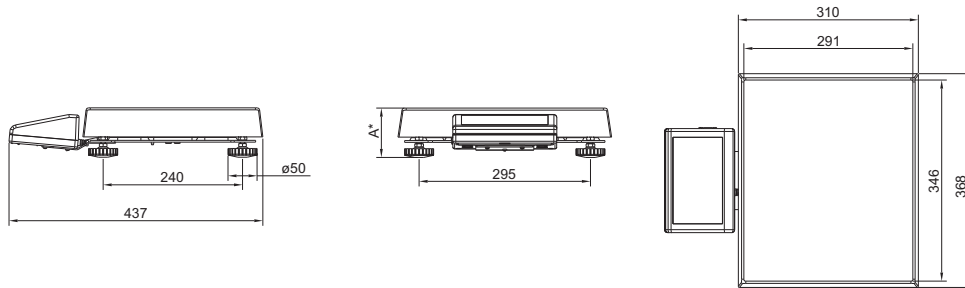


	A (±2mm)
WPT 6 C1/R	86
WPT 15 C1/R	86
WPT 30 C1/R	86
WPT 3/6 C1/R	86
WPT 6/15 C1/R	86
WPT 15/30 C1/R	104
WLC 6 C1/R	86
WLC 15 C1/R	86
WLC 30 C1/R	86

WPT C1/K



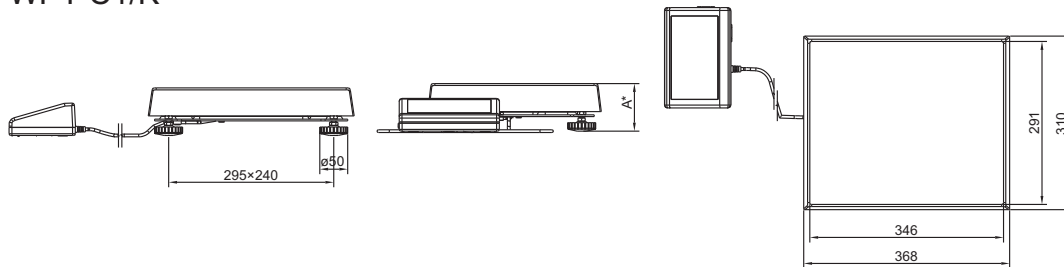


	A (±2mm)
WPT 6 C1/K	86
WPT 15 C1/K	86
WPT 30 C1/K	86
WPT 3/6 C1/K	86
WPT 6/15 C1/K	86
WPT 15/30 C1/K	104
WLC 6 C1/K	86
WLC 15 C1/K	86
WLC 30 C1/K	86



WPT C2

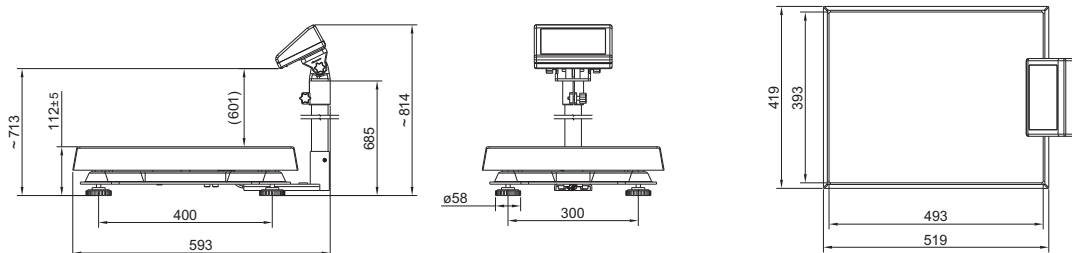




WPT C2/R





WPT C2/K

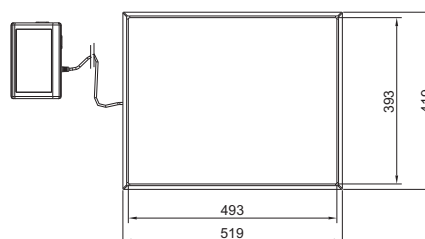

WPT C3

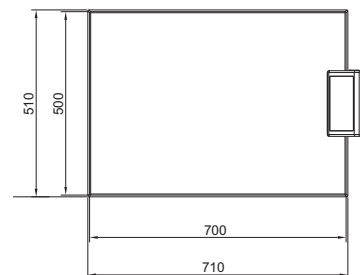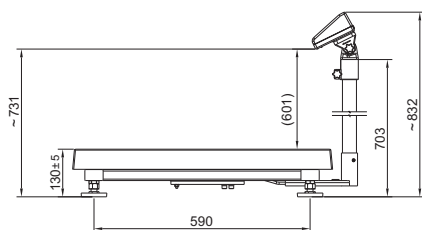

WPT C3/K

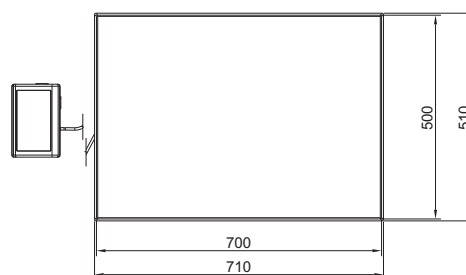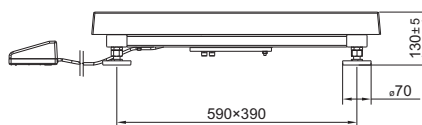

Additional equipment:

ANTI-VIBRATION TABLE

KAFKA THERMAL PRINTER

EPSON IMPACT PRINTER

ANTI-DUST CASE FOR EPSON PRINTER

STAND FOR THE INDICATOR

HANDLE FOR INDICATOR IN PLASTIC HOUSING

RS 232 / RS 485 CONVERTER KR-01

RS 232 / ETHERNET CONVERTER KR-04

LCD DISPLAY WWG-2 (DIGIT HEIGHT 4,5")

LCD DISPLAY IN PLASTIC HOUSING

EXTERNAL POWER OUTPUT

TABLE FOR SCALE

PW-WIN COMPUTER SOFTWARE

RAD-KEY COMPUTER SOFTWARE

LS-FS COMPUTER SOFTWARE

RS 232 CABLE: SCALE - THERMAL PRINTER: P0136

RS 232 CABLE: SCALE - "EPSON" PRINTER: P0151

RS 232 CABLE: SCALE - COMPUTER: P0108

CABLE FOR PLUGGING THE SCALE TO A CAR LIGHTER: K0047

LCD DISPLAY IN STAINLESS STEEL HOUSING

RADWAG

26-600 Radom • Bracka Street 28 • POLAND • Phone: +48 48 3848800 • Fax: +48 48 3850010 • www.radwag.com • e-mail: export@radwag.com